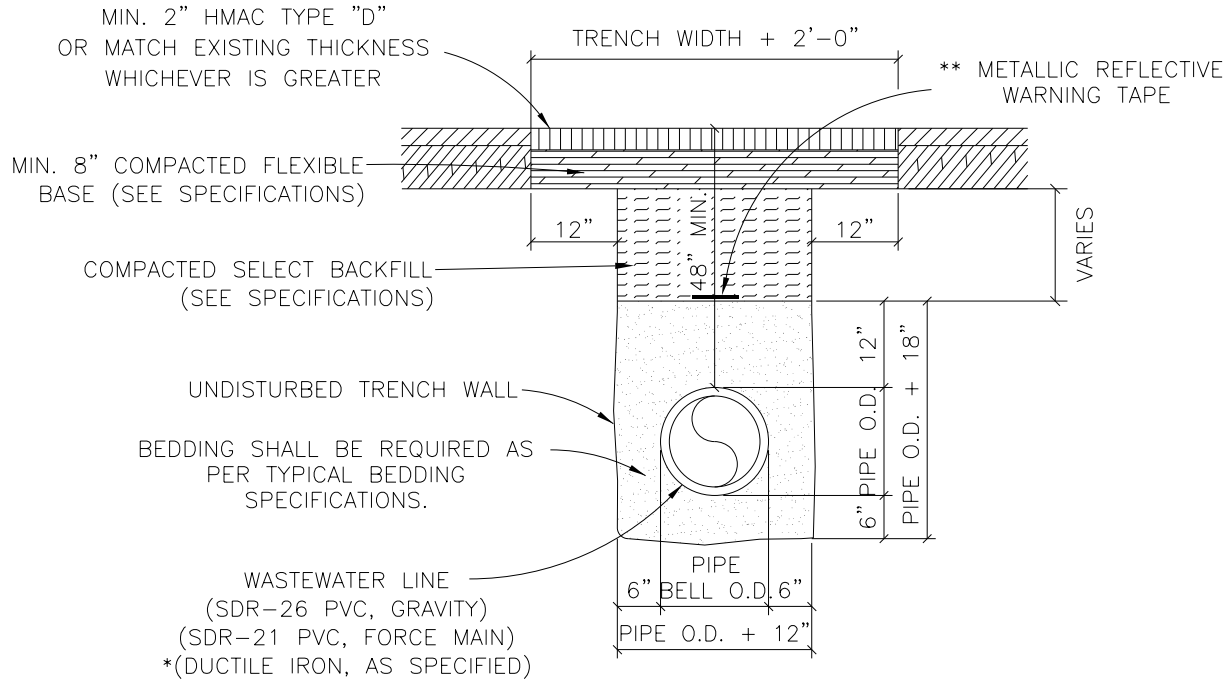

NOTES:

1. REPLACED BASE MATERIAL OVER DITCH SHALL BE A MINIMUM OF TWICE THE THICKNESS OF THE ORIGINAL BASE AND IN NO CASE LESS THAN 8".
2. BASE MATERIAL SHALL BE PLACED IN MAXIMUM 6" LIFTS AND EACH LIFT COMPACTED TO SPECIFIED DENSITY.
3. ASPHALT CONCRETE PAVEMENT JOINTS SHALL BE MECHANICALLY SAWED.
4. A MINIMUM OF ONE DENSITY TEST SHALL BE TAKEN EVERY TWO HUNDRED (200) FEET FOR EACH EIGHT (8) INCH LOOSE LIFT OF SUBGRADE AND EACH OPEN CUT CROSSING. ADDITIONAL TESTS MAY BE REQUIRED AT THE ENGINEER'S DISCRETION. ALL DENSITY TESTS SHALL BE COMPLETED AND ACCEPTED ON EACH LAYER PRIOR TO ADDITIONAL BACKFILLING. A COPY OF ALL COMPLETED AND ACCEPTED DENSITY TESTS SHALL BE FURNISHED TO THE OWNER.
5. CONTRACTOR OR ENGINEER MAY REQUEST FOR USE OF ALTERNATE BACKFILL MATERIAL. ALTERNATE MATERIALS AND TESTING PROTOCOL MUST BE SUBMITTED TO AND APPROVED BY THE CITY ENGINEER PRIOR TO USE.

** REFLECTIVE WARNING TAPE SHALL INDICATE "PRESSURIZED WASTEWATER" FOR PRESSURE LINES IN AT LEAST 1.5" LETTERS CONTINUOUSLY REPEATED. REFLECTIVE WARNING TAPE SHALL INDICATE "BURIED SEWER LINE BELOW" FOR GRAVITY SEWER LINES.

* THIS DETAIL HAS BEEN MODIFIED TO INCLUDE DUCTILE IRON PIPE.

SCALE: NOT TO SCALE

Marble Falls
TEXAS

MARBLE FALLS
800 THIRD STREET
MARBLE FALLS, TX 78654
PH: (830) 693-6737

These documents were prepared by, or under the supervision of:

ERIC BELAJ | 107148 | May 31, 2017
Engineer's Name | PE# | Date

Engineer's Signature

SECTION
WASTEWATER

DETAIL NO.
WW-3

TITLE
EMBEDMENT UNDER EXISTING PAVEMENT