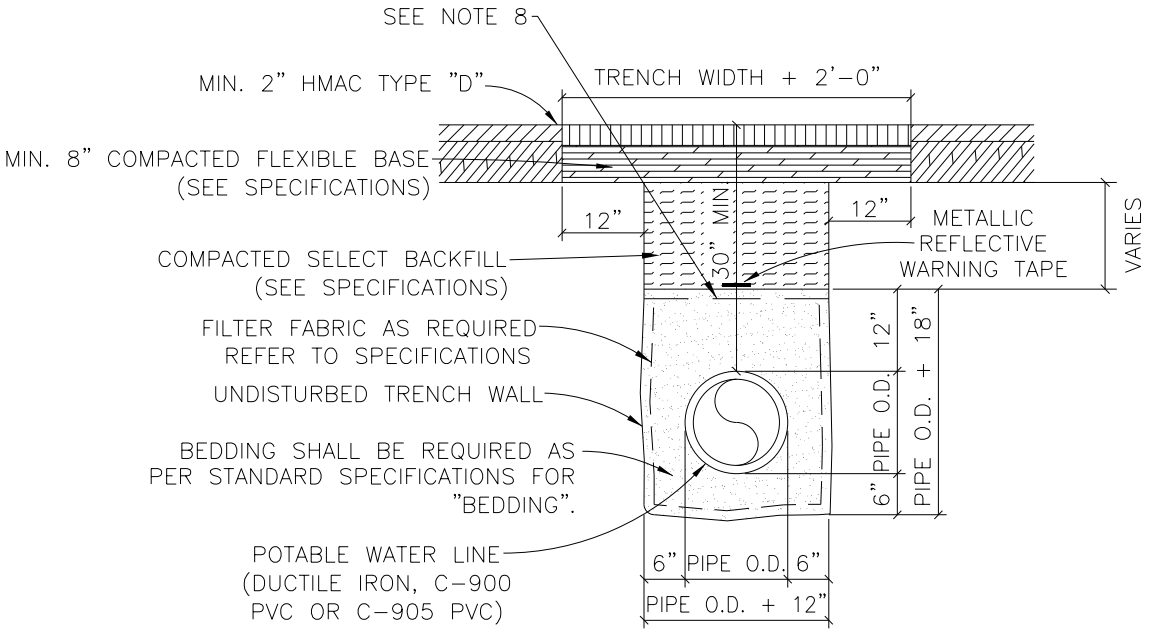

NOTES:

1. REPLACED BASE MATERIAL OVER DITCH SHALL BE A MINIMUM OF TWICE THE THICKNESS OF THE ORIGINAL BASE AND IN NO CASE LESS THAN 8".
2. BASE MATERIAL SHALL BE PLACED IN MAXIMUM 6" LIFTS AND EACH LIFT COMPACTED TO SPECIFIED DENSITY.
3. ASPHALT CONCRETE PAVEMENT JOINTS SHALL BE MECHANICALLY SAWED.
4. A MINIMUM OF ONE DENSITY TEST SHALL BE TAKEN EVERY TWO HUNDRED (200) FEET FOR EACH EIGHT (8) INCH LOOSE LIFT OF SUBGRADE AND EACH OPEN CUT CROSSING. ADDITIONAL TESTS MAY BE REQUIRED AT THE ENGINEER'S DISCRETION. ALL DENSITY TESTS SHALL BE COMPLETED AND ACCEPTED ON EACH LAYER PRIOR TO ADDITIONAL BACKFILLING. A COPY OF ALL COMPLETED AND ACCEPTED DENSITY TESTS SHALL BE FURNISHED TO THE OWNER.
5. CONTRACTOR OR ENGINEER MAY REQUEST FOR USE OF ALTERNATE BACKFILL MATERIAL. ALTERNATE MATERIALS AND TESTING PROTOCOL MUST BE SUBMITTED TO AND APPROVED BY THE CITY ENGINEER PRIOR TO USE.
6. ALL COMMUNICATION CONDUIT TO INCLUDE A 1500 LB CONTINUOUS MULE TAPE IN PLACE BETWEEN PULL BOXES.
7. ALL INSTALLED CONDUITS MUST PASS A PULL TEST WITH A FULL SIZED MANDREL.
8. FILTER FABRIC ALONG THE TOP OF THE TRENCH IS REQUIRED REGARDLESS OF SUBSURFACE CONDITIONS.

SCALE: NOT TO SCALE

Marble Falls
TEXAS

MARBLE FALLS
800 THIRD STREET
MARBLE FALLS, TX 78654
PH: (830) 693-6737

These documents were prepared by, or under the supervision of:

ERIC BELAJ | 107148 | May 31, 2017
Engineer's Name | PE# | Date

Engineer's Signature

SECTION
WATER

DETAIL NO.
WT-3

TITLE
EMBEDMENT UNDER EXISTING PAVEMENT