


40 LB. SANDBAGS @3' O.C.  
(SEE NOTE 1)

12 GAUGE, 2" x 4"  
WIRE FABRIC STRUCTURE  
(ALL 4 SIDES OF INLET)

PLAN

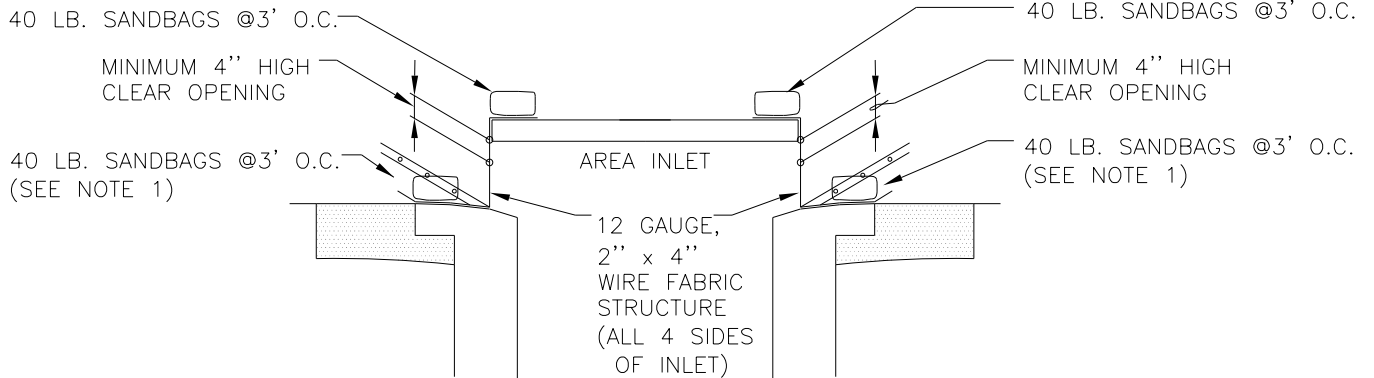

40 LB. SANDBAGS @3' O.C.

MINIMUM 4" HIGH  
CLEAR OPENING

40 LB. SANDBAGS @3' O.C.  
(SEE NOTE 1)

AREA INLET

12 GAUGE,  
2" x 4"  
WIRE FABRIC  
STRUCTURE  
(ALL 4 SIDES  
OF INLET)

40 LB. SANDBAGS @3' O.C.

MINIMUM 4" HIGH  
CLEAR OPENING

40 LB. SANDBAGS @3' O.C.  
(SEE NOTE 1)

SECTION

AREA/GRATE INLET PROTECTION:

1. WHERE MINIMUM CLEARANCES CAUSE TRAFFIC TO DRIVE IN THE GUTTER, THE CONTRACTOR MAY SUBSTITUTE A 1"x4" BOARD SECURED WITH CONCRETE NAILS 3' O.C. NAILED INTO THE GUTTER IN LIEU OF SANDBAGS TO HOLD THE FILTER DIKE IN PLACE. UPON REMOVAL, CLEAN ANY DIRT/DEBRIS FROM NAILING LOCATIONS, APPLY CHEMICAL SANDING AGENT AND APPLY NON-SHRINK GROUT FLUSH WITH SURFACE OF GUTTER.
2. A SECTION OF FILTER FABRIC SHALL BE REMOVED AS SHOWN ON THIS DETAIL OR AS DIRECTED BY THE ENGINEER OR DESIGNATED REPRESENTATIVE. FABRIC MUST BE SECURED TO WIRE BACKING WITH CLIPS OR HOG RINGS AT THIS LOCATION.
3. DAILY INSPECTION SHALL BE MADE BY THE CONTRACTOR AND SILT ACCUMULATION MUST BE REMOVED WHEN DEPTH REACHES 2".
4. CONTRACTOR SHALL MONITOR THE PERFORMANCE OF INLET PROTECTION DURING EACH RAINFALL EVENT AND IMMEDIATELY REMOVE THE INLET PROTECTIONS IF THE STORM-WATER BEGINS TO OVERTOP THE CURB.
5. INLET PROTECTIONS SHALL BE REMOVED AS SOON AS THE SOURCE OF SEDIMENT IS STABILIZED.

SCALE: NOT TO SCALE



MARBLE FALLS

800 THIRD STREET  
MARBLE FALLS, TX 78654

PH: (830) 693-6737

These documents were prepared by,  
or under the supervision of:

ERIC BELAJ 107148 May 31, 2017  
Engineer's Name PE# Date

Engineer's Signature

SECTION

**EROSION CONTROL**

DETAIL NO.

EC-8

TITLE

AREA INLET PROTECTION