

**CHAIN-LINK BARRIER FENCE (6 FT.)**

\*\* THICKNESS EQUAL TO THICKNESS OF GATE FRAME, OR GREATER




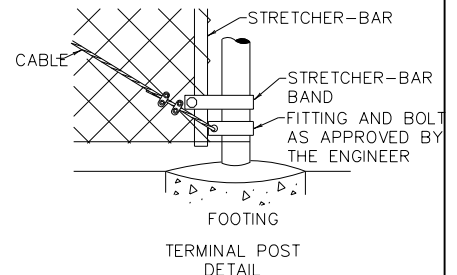


TABLE OF MINIMUM SIZES & WEIGHTS

GATE OPENING TYPE			
SINGLE INCLUSIVE		DOUBLE INCLUSIVE	
UP TO 6'		UP TO 12'	
OVER 6' TO 12'		OVER 12' TO 26'	
OVER 12' TO 18'		OVER 26' TO 36'	
OVER 18'		OVER 36'	
GATE FRAME		GATE POST	
SIZE	WT./LIN. FT.	SIZE	WT./LIN. FT.
1-1/2" NOM D	2.72 LBS.	2-1/2" NOM D	5.79 LBS.
OR EQUAL	2.72 LBS.	OR EQUAL	
	2.72 LBS.	3-1/2" NOM D	9.11 LBS.
		OR EQUAL	
		6" NOM D	18.97 LBS.
		8" NOM D	24.70 LBS.

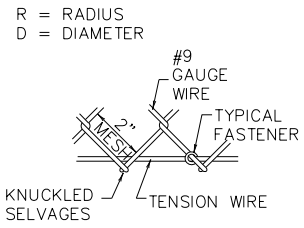

**CHAIN-LINK BARRIER FENCE**  
6 FOOT HEIGHT SECURITY

FABRIC & TENSION WIRE DETAIL TOP & BOTTOM

**GENERAL NOTES:**

1. TYPICAL INSTALLATION PLAN MAY VARY AS SHOWN ELSEWHERE ON THE PLANS OR AS DIRECTED BY THE ENGINEER. LOCATION OF GATES SHOWN ELSEWHERE ON PLANS.
2. GATE-FRAME MEMBERS SHALL BE BOLTED, AT FRAME CORNERS, TO JOINT FITTINGS WITH FOUR 1/2" BOLTS PER JOINT.
3. ALL CABLE CONNECTIONS ARE TO BE MADE WITH TWO 3/8" CABLE CLAMPS.
4. ALL PULL POSTS AND END POSTS AND THEIR FOUNDATIONS SHALL HAVE THE SAME RESPECTIVE DIMENSIONS AS THOSE SHOWN FOR CORNER POST.
5. ALL PULL POST SHALL BE FURNISHED WITH TWO STRETCHER BARS.
6. ONE END OF EACH TURNBUCKLE MAY BE ATTACHED DIRECTLY TO FITTINGS WITH A CLEVIS.
7. BARBED WIRE ARMS SHALL BE ACCORDING TO INDUSTRY STANDARD AND APPROVED BY THE ENGINEER.

SCALE: NOT TO SCALE



MARBLE FALLS  
800 THIRD STREET  
MARBLE FALLS, TX 78654  
PH: (830) 693-6737

These documents were prepared by,  
or under the supervision of:

ERIC BELAJ 107148 May 31, 2017  
Engineer's Name PE# Date

*[Signature]*  
Engineer's Signature

SECTION  
**PAVING**

DETAIL NO.  
**PV-32**

TITLE  
SECURITY FENCE